

Bomba Booster en Línea Tipo Multitazonas

CLAVE	MODELO	POTENCIA		MOTOR	H. MÁXIMA m	CONEXIONES		RANGO OPERACIÓN		DIMENSIONES mm	PESO
		HP	W			SUCCIÓN	DESCARGA	H(m)	Q(l/min)		
2351	BL4-3	1½	1100	220V~60Hz 3F	40	1¼"	1¼"	40÷18	41.7÷150	600 x 230 x 290	20 Kg
2352	BL4-4	2	1500		53			53÷24	41.7÷150	650 x 230 x 290	25 Kg
2353	BL4-6	3	2200		80			80÷36	41.7÷150	750 x 230 x 290	35 Kg
2354	BL4-8	4	3000		107			107÷49	41.7÷150	805 x 230 x 310	40 Kg
2355	BL4-12	5½	4000		161			161÷74	41.7÷150	1000 x 260 x 280	45 Kg
2356	BL4-16	7½	5500		215			215÷99	41.7÷150	1160 x 290 x 410	70 Kg




EMBOBINADO  
DE COBRE 100%



PARA AGUA LIMPIA  
(LIBRE DE SÓLIDOS)



MOTOR 220V~60Hz 3F  
OPCIONAL 440V ~60Hz 3F  
CLAVE: 1699 X 10

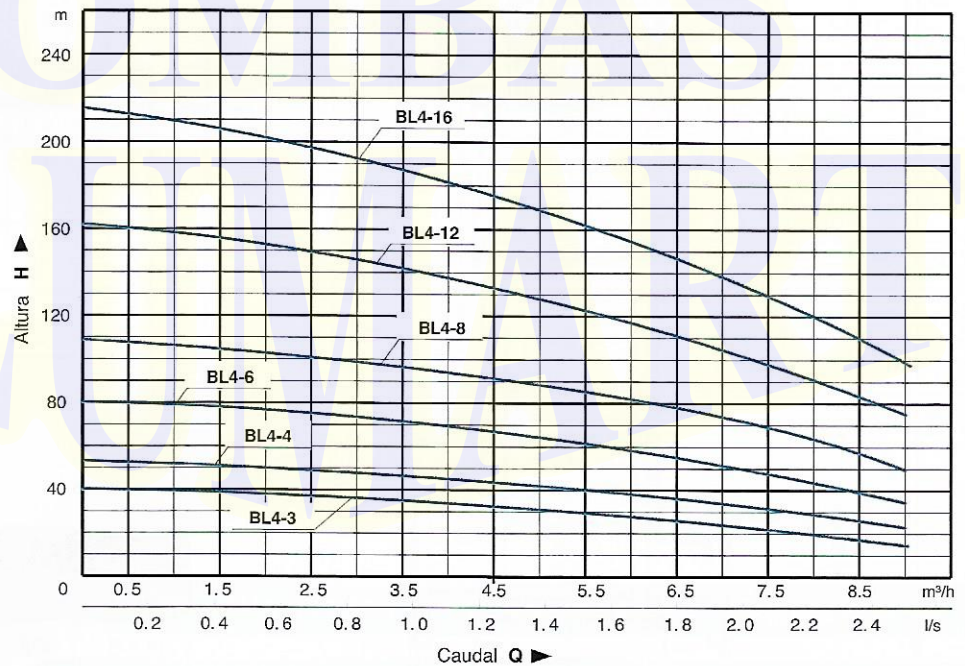


\*Las partes donde pasa el agua son de Acero inoxidable (304).

Refacciones para Mantenimiento y Reparación

BOMBA MODELO	BALEROS		SELLO MECÁNICO	
	MODELO	CLAVE	MODELO	CLAVE
BL4-3	6204 2RZ	4024	LMA8-12WAFC	2091
BL4-4	6205 2RZ	4025		
BL4-6		4026		
BL4-8	6206 2RZ	4026		
BL4-12	6206 2RZ	4026		
BL4-16	6208 2RZ	4028		

Dimensiones de instalación (Milímetros)

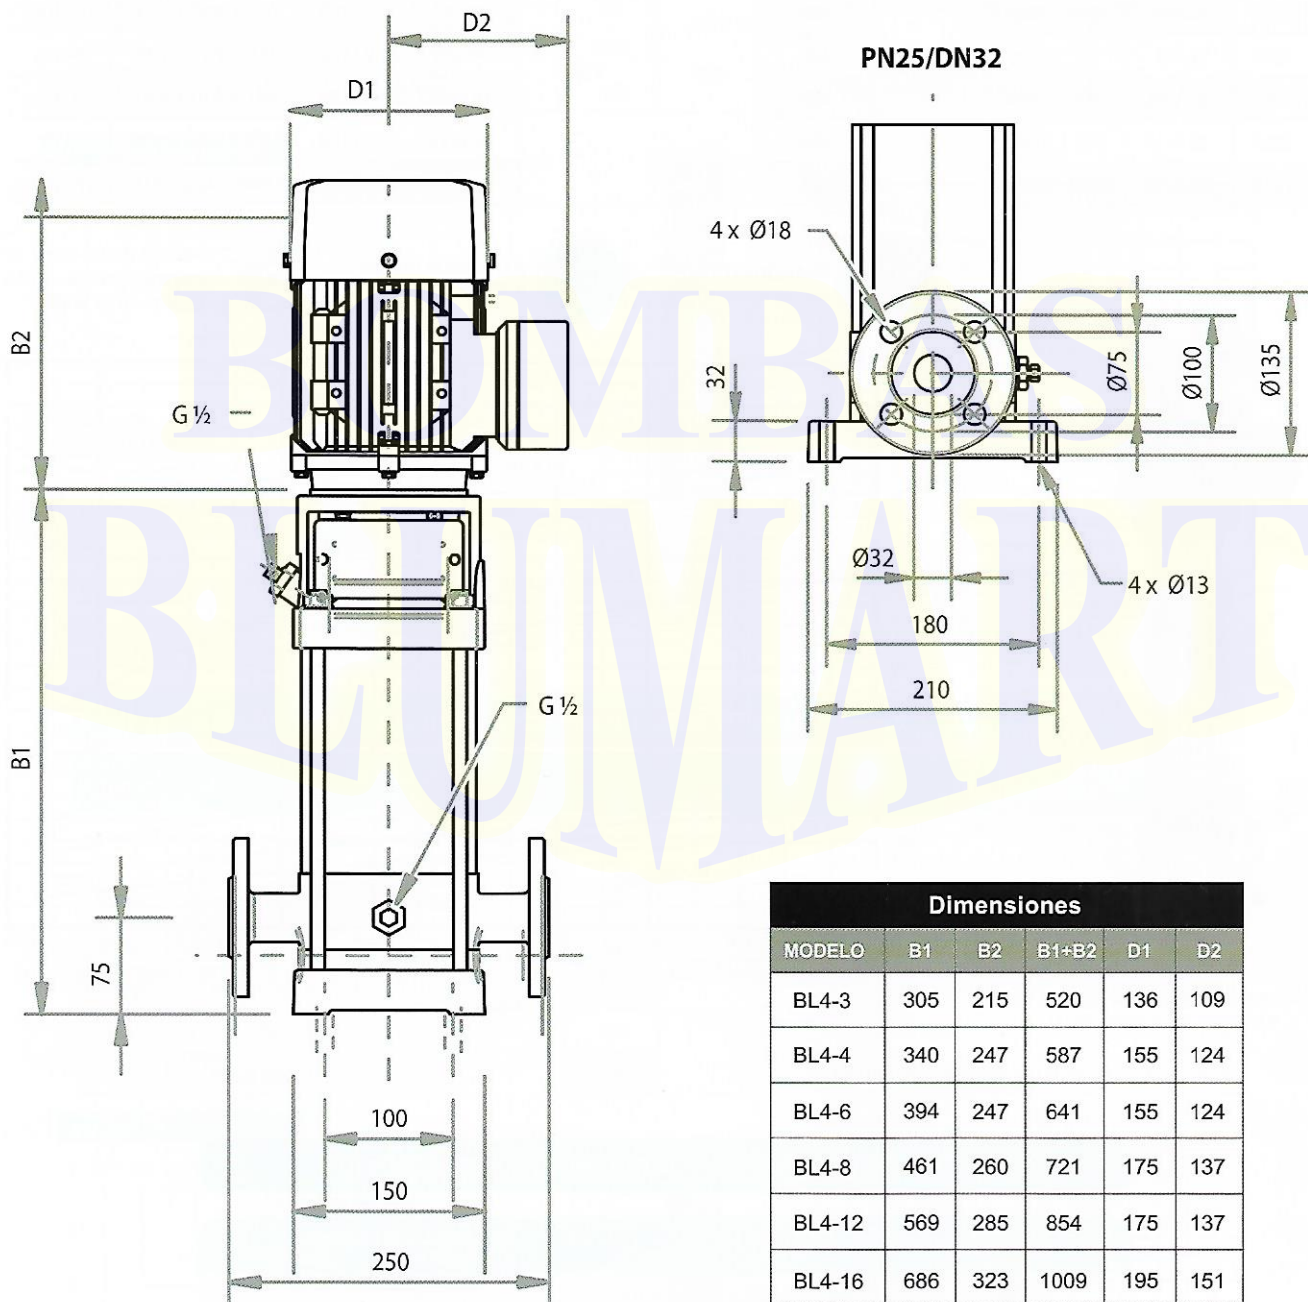

Dimensiones					
MODELO	B1	B2	B1+B2	D1	D2
BL4-3	305	215	520	136	109
BL4-4	340	247	587	155	124
BL4-6	394	247	641	155	124
BL4-8	461	260	721	175	137
BL4-12	569	285	854	175	137
BL4-16	686	323	1009	195	151