

Bomba Sumergible para Agua Sucia

CLAVE	MODELO	POTENCIA HP	W	MOTOR	H. MÁXIMA m	DESCARGA	RANGO OPERACIÓN H(m) Q(l/min)	PASO DE SÓLIDOS	DIMENSIONES mm	PESO
2481	DWE08V	1	750	220V~60Hz 3F	12.5	NPT 2"	11÷4.8 100÷320	¾"	220 x 180 x 410	23 Kg
2482	DWE15V	2	1500		16		14÷6 120÷420		220 x 180 x 440	27 Kg
2483	DWE22V	3	2200		19	NPT 3"	17.5÷8 150÷580	230 x 210 x 290	34 Kg	
2484	DWE37V	5	3700		25		21.5÷9 180÷640	230 x 210 x 510	38 Kg	




EMBOBINADO
DE COBRE 100%



PARA AGUA SUCIA



MOTOR 220V~60Hz 3F
OPCIONAL 440V~60Hz 3F
CLAVE: 1699 X 10

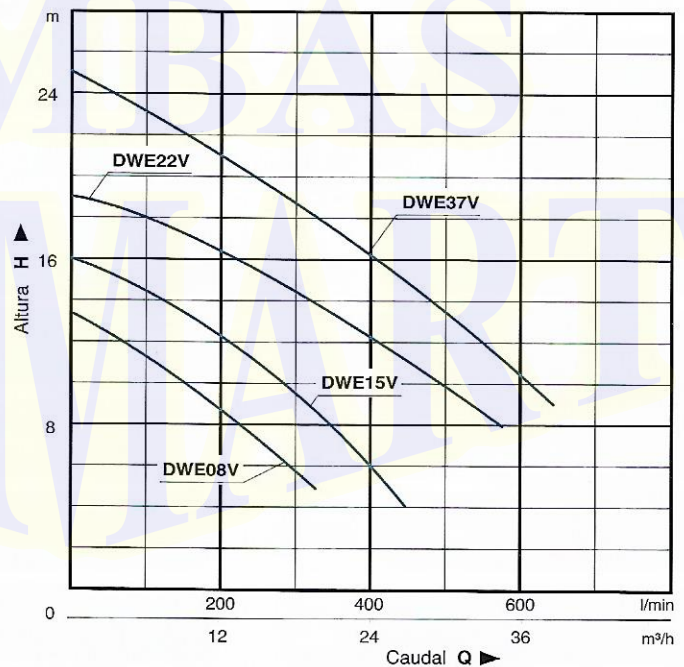

*Impulsor abierto tipo vórtex en Hierro Fundido.
*Sólido máximo: 5%. *En 220V opcional a 440V.

APLICACIONES: Uso Residencial, Agrícola e Industrial.

Refacciones para Mantenimiento y Reparación

BOMBA MODELO	BALEROS		SELLO MECÁNICO	
	MODELO	CLAVE	MODELO	CLAVE
DWE08V	6202 2RZ	4022	LM208-18ABASPC	5116
DWE15V	6204 2RZ	4024		
DWE22V	6203 2RZ	4023	LM208-20ABSBP	5117
DWE37V	6205 2RZ	4025		