

Bomba Sumergible Tipo Lapicero para Agua Limpia

CLAVE	MODELO	POTENCIA HP	W	MOTOR	H. MÁXIMA m	DESCARGA	FLUJO / ALTURA								DIMENSIONES mm	PESO				
							l/min	0	10	20	30	40	50	60			70			
4401	4SEm2/5-0.37	½	370	127V~60Hz 1F	52	NPT 1½"	H (m)	52	50	48	45	40	33	24	15	810 x 200 x 110	10 Kg			
4402	4SEm2/7-0.55	¾	550		75			75	73	70	65	58	50	39	23			890 x 200 x 110	12.5 Kg	
4403	4SEm2/9-0.75	1	750		94			94	92	85	75	62	47	31	990 x 200 x 110					13 Kg
4404	4SEm2/13-1.1	1½	1100		104			104	100	93	82	67	50	33						

MOTOR CON
PROTECCIÓN TÉRMICA



EMBOBINADO
DE COBRE 100%



PARA AGUA LIMPIA
(LIBRE DE SÓLIDOS)




DIÁMETRO DE BOMBA
4"

INSTRUCTIVO DE LECTURA

4 SE m 2 /5 -0.37

- Potencia de Motor kW
- Número de Impulsores
- Caudal nominal (m3/h)
- Código de Fase: 60 Hz
- Tipo de Rango
- Diámetro de la bomba (pulgada)

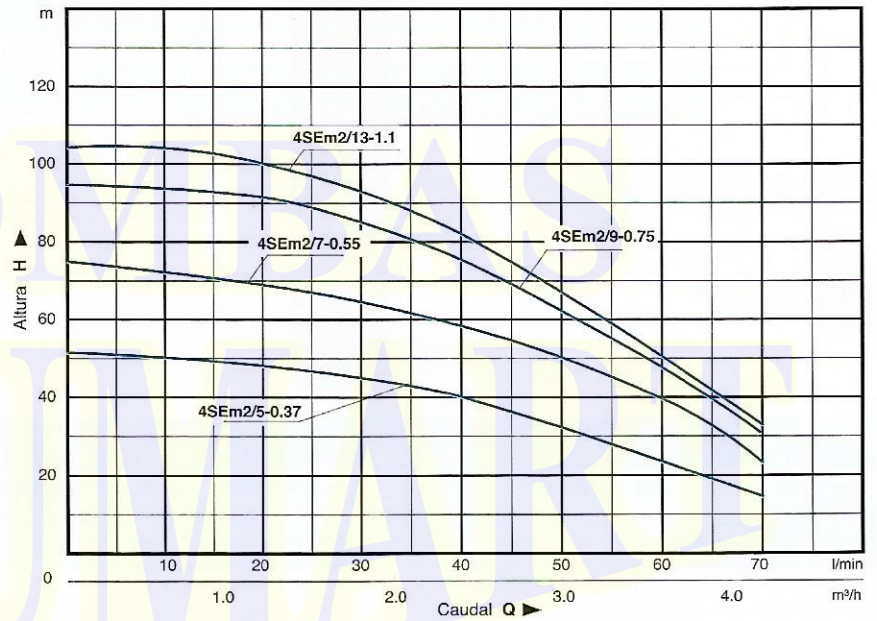

*Descarga en hierro fundido.

*No necesita caja de control, capacitor integrado.